




## K20 DUAL KINETIC PUMP



**DUAL KINETIC PUMP IS SUPERIOR TO ANY COMPARABLE SYSTEM IN THE FINISHING INDUSTRY**

- \*20: 1 ratio unit handles high pressure applications and high viscosity coatings with out needing heat**
- \*Delivers 51 oz. per minute at 60 cycle while still able to work at low pressure for lighter viscosity coatings**
- \*Manufactured by A.O.M. a leader in spray painting equipment and pumps since 1925**
- \*Adjustable spray pressure up to 2000 psi.**

- \*Hard chrome over stainless steel**
- \*Self adjusting packings**
- \*Fluid section size allows for easy change of coatings**
- \*New ultra flex hose set**
- \*Very low compressed air consumption, runs with a 2 hp compressor**

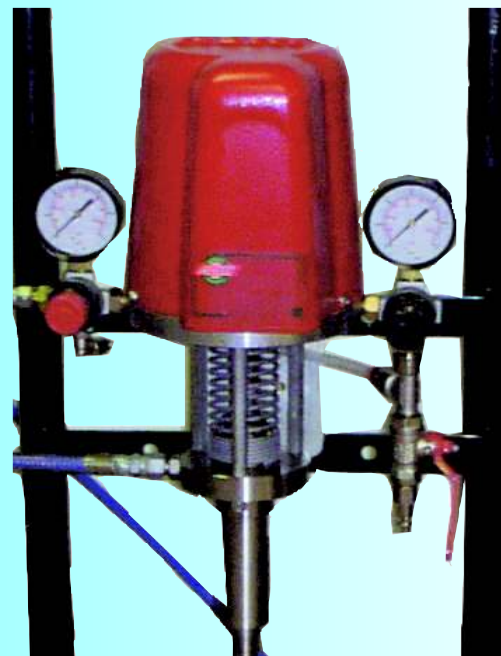

**Superior performance and easy to use- this pump is THE CHOICE for almost any coating application**

# K 20 DUAL KINETIC PUMP

Perfect for high pressure dual kinetic or air assisted spraying operations with high viscosity coatings or when finer atomization is required. Excellent results with almost all coatings and applications including wood, metal and plastic.



**K1 3/A MIX  
with optional  
TRI-A MIX TIP  
(self-cleaning)**



**K1 3/A MIX  
with  
STANDARD TIP**

ORDER #	DESCRIPTION
142002SMC	K 20 PUMP, CART MOUNTED, PICK-UP TUBE, K1 3/A GUN, 25' HOSE w/ TRI-A Mix tip
142003SMC	K 20 PUMP, WALL MOUNT, PICK-UP TUBE, K1 3/A GUN, 25' HOSEw/ TRI-A Mix tip
142000SMC	K 20 PUMP, CART MOUNTED, PICK-UP TUBE, K1 3/A GUN w/standard tip, 25' HOSE
142001SMC	K 20 PUMP, WALL MOUNT, PICK-UP TUBE, K1 3/A GUN w/standard tip GUN, 25' HOSE
142000SM	K 20 CART MOUNTED PUMP WITH PICK-UP TUBE ONLY
142001SM	K 20 WALL MOUNT CART WITH PICK-UP TUBE ONLY

### TECHNICAL INFORMATION:

- \*RATIO: 20:1
- \*DELIVERY AT 60 CYCLES: 51 OZ. PER MINUTE
- \*FLUID INLET PORT: 1/2" M
- \*FLUID OUTLET PORT: 1/4" NPS
- \*AIR INLET: 1/4" NPS
- \*PUMP INLET AIR PRESSURE RANGE: 10-100 PSI
- \*DISCHARGE PRESSURE RANGE: 200-2000 PSI
- \*AIR CONSUMPTION @30 CYCLES /MIN: 3.5 CFM
- \*FLUID CONTACT METAL: HARD CHROME STAINLESS STEEL
- \*ALSO AVAILABLE WITH #520005 GRAIVTY TANK OR #142100M THREE WAY PICK-UP SYSTEM WITH SHUT-OFF VALVES

### K20 DUAL KINETIC PUMP FEATURES:

- \*PUMPS UP TO 7000 CPS COATINGS
- \*COMPACT DESIGN FOR EASY INSTALLATION AND MINIMAL SPACE IN SHOP
- \*SMALL FLUID PASSAGES FOR MINIMAL WASTE
- \*ACCOMODATES LONG FLUID DELIVERY HOSES
- \*SMALL FLUID SECTION FOR EASY COLOR CHANGE
- \*SMALL AIR MOTOR FOR VERY LOW COMPRESSED AIR CONSUMPTION
- \*EASY TO REPAIR
- \*AVAILABLE WALL, CART, OR PAIL MOUNTED

VOLUME PER CYCLE	DELIVERY	MAX. FLUID PRESSURE	MAX.AIR PRESSURE	WORKING PRESSURE	AIR CONSUMPTION	WEIGHT
(OZ)	(G.P.M.)	(PSI)	(PSI)	(PSI)	(C.F.M.)	(LB)
.85	.4	2300	115	115	3.75	35

### DISTRIBUTOR

**A.O.M. SPRAY EQUIPMENT**  
**5005 SANBUSCO DR. NE**  
**RIO RANCHO, NM 87144**  
**505-867-1946**

**FAX: 505-867-1948**

**E-MAIL: AOMAMERICA@AOL.COM**

**HTTP: WWW.AOMSPRAY.COM**